

REDLINE+ VALVES & SEATS

Argentina



WE BUILD CONFIDENCE.

FIELD TEST CONDITIONS

SIZE

P4



LOCATION

LAJAS
FORMATION



TIMELINE

2
MONTHS




VOLUME

1665M3
LBS/SLURRY

NUMBER OF PUMPS

10
2500Q
HDF
Quint

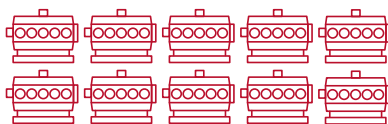

MAXIMUM OPERATING PRESSURE

11,200 PSI



TYPE OF SAND

30/140 WET



PRODUCED
WATER

NO

FRICTION
REDUCER


YES

FLOW RATE

98 BPM

PERFORMANCE AGAINST COMPETITOR

INCREASED PERFORMANCE LIFE



**70% LONGER VALVE
AND SEAT LIFE**



**57% INCREASE IN
STAGES ACHIEVED**



**30% FEWER VALVE
AND SEAT CHANGEOUTS**